

ADDENDUM NO. 1


OAKDALE PARK LANDSCAPING IMPROVEMENTS




BID DATE: January 20, 2010

Dated: January 13, 2010

PAGE 1: 3 Concrete Planter Installation

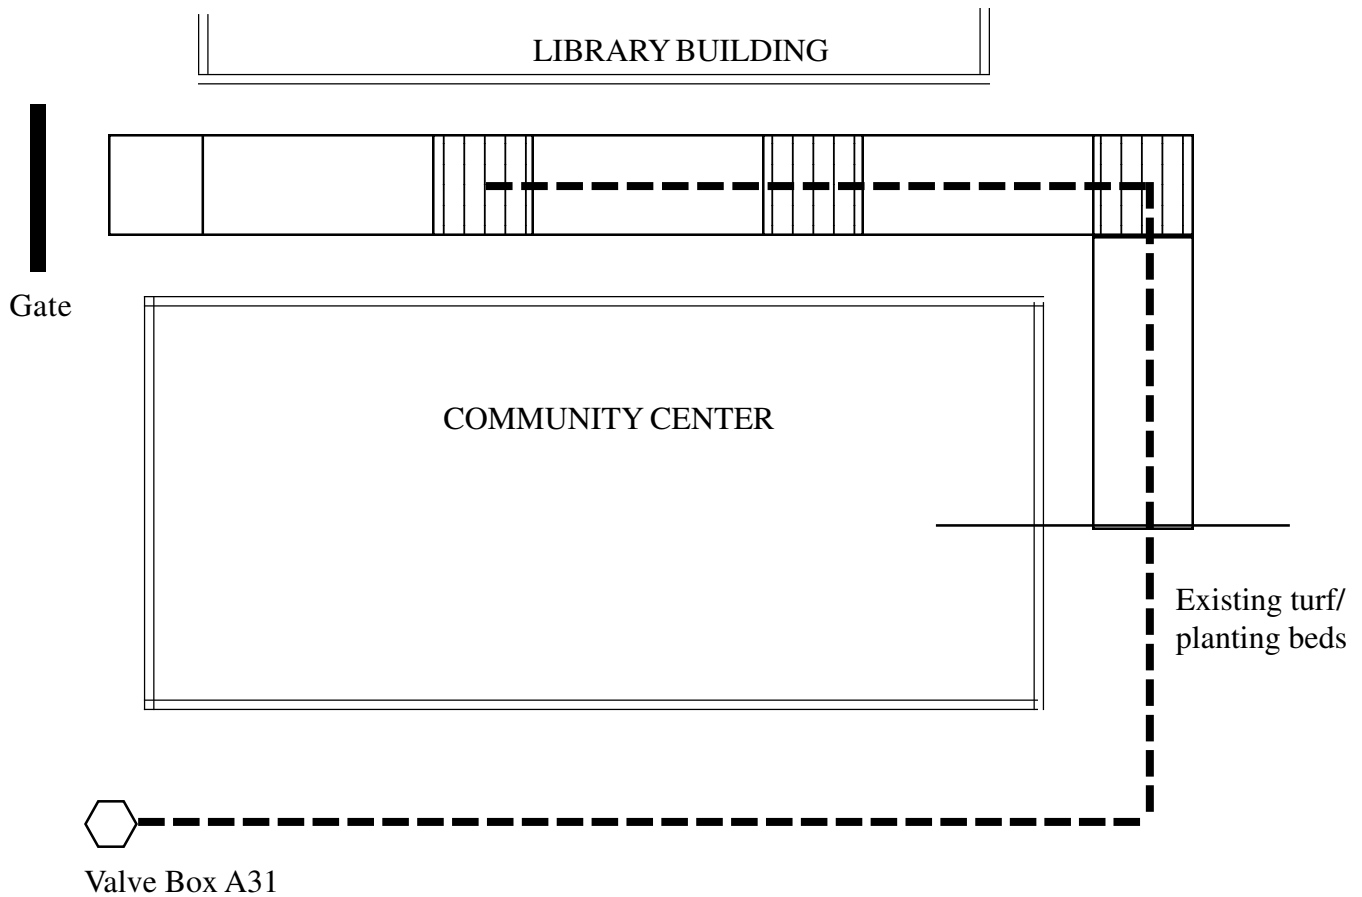- A. Run Sch.40 irrigation line from Valve Box A31 to the east and around the community center to the concrete and under the concrete connecting the three planters. Use the same valve box to connect to keystone planters and the Gymnasium planter.
- B. Remove the center concrete pads for the irrigation lines. Replace concrete as the same finish.



-  Location of round 48" concrete planters
-  Concrete
-  Irrigation Line

NOT TO SCALE

ADDENDUM NO. 1

OAKDALE PARK LANDSCAPING IMPROVEMENTS


BID DATE: January 20, 2010
Dated: January 13, 2010

PAGE 1, con't.:

- C. Add 5'x5' concrete pad connectng the concrete walkway at the southwest edge of the community center to the existing concrete pad on the west side of the building.

PAGE 2: Gymnasium Planting Bed Addition

- A. The dimensions for the bed are 11'5" x 14'9". This includes removing four sections of concrete and cobble.
- B. Trench from valve #A31 located approximately 8 feet south of the community center building on the east side.

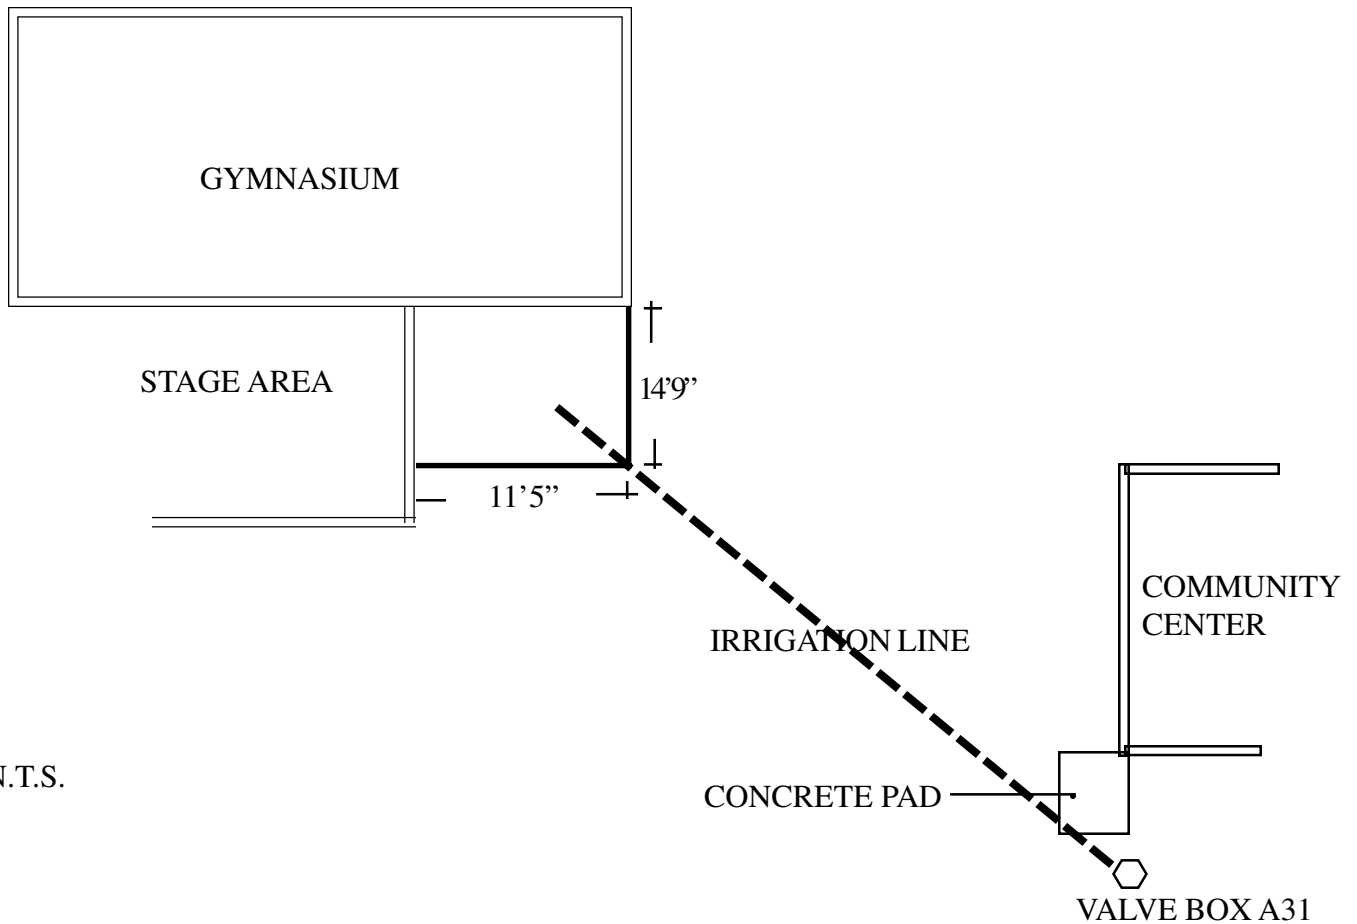

N.T.S.